




OCC-B-FR-PX2 OIL CATCH CAN KIT

- Remove the standard rubber breather hose from rocker cover to air intake pipe.
- Bolt new catch can mounting bracket to vehicle with bolts and washers as per picture.
- Screw 2 x fittings into catch can.
- Bolt catch can to mounting bracket using 4x m6 button head screws.
- Join the 2x 90° hoses together with joiner and clamps supplied.
- Fit the hose assembly between air intake pipe and catch can inlet.
- Cut the first bend off of the standard hose at the front of the vehicle and connect to catch can.



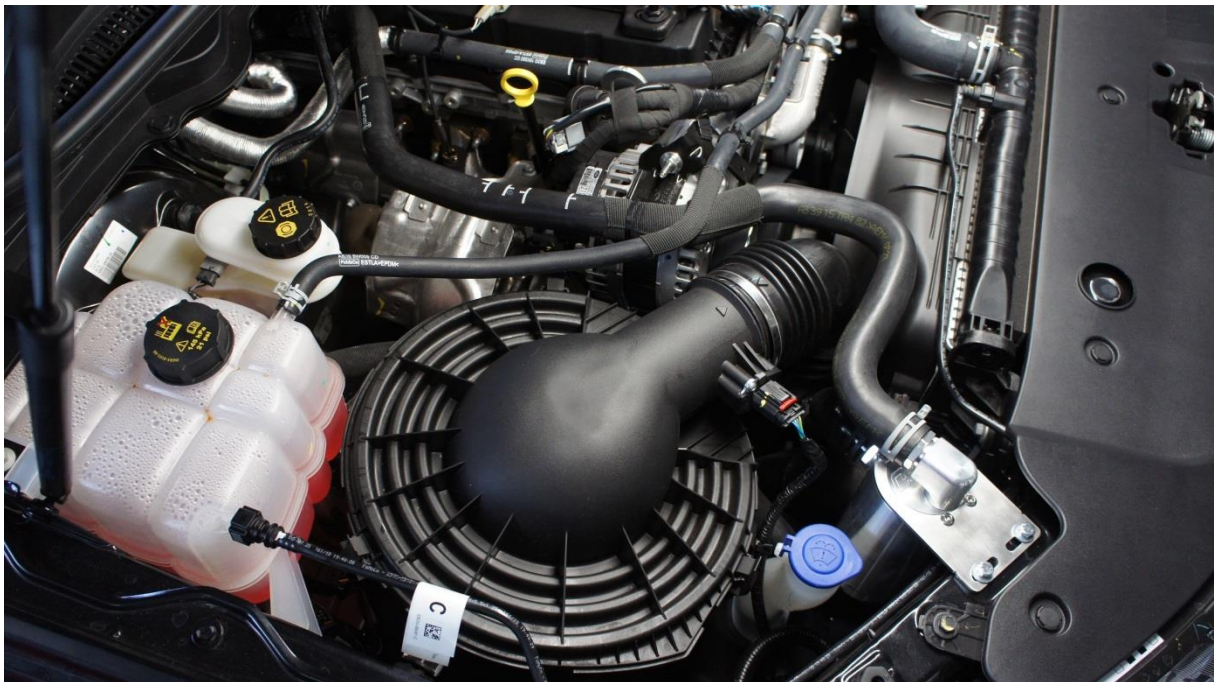

HPD OIL AIR SEPERATOR/CATCH CAN



The HPD oil air separator has been designed to significantly reduce the oil vapour from the rocker cover breather going into the intake of the turbo. The oil will build up in the intercooler and piping causing intercooler inefficiency. The evidence of this is oil leaking from the turbo charger and silicone hose joints. The HPD oil air separator eliminates the build-up of black sludge in the inlet manifold. This is caused by the mixing of oil from rocker cover breather and carbon from the EGR. This black sludge coats the entire inside of the inlet manifold and inlet ports in cylinder head and can eventually build up and restrict airflow. Which can eventually cause premature engine failure?

The HPD oil air separator has some unique features here are some of them.

- Internal stainless mesh filters that can be removed for cleaning.
- Dip stick to check oil level.
- Stainless steel mounting bracket and 4 bolts with 5 positions available.
- Simply unscrew base to empty oil.
- Screw in hose fittings are available in a variety of sizes 10, 12,16,19,25.
- 360° swivel top port which allows hose to rotate to any position
- Vehicle specific kits including hoses clamps and mounting brackets.



FORD RANGER PX mkII CATCH CAN

OCC-B-FR-PX2



<u>QUANTITY</u>	<u>PART</u>	<u>DESCRIPTION</u>	<u>PACKED</u>
1	OCC-B	BILLET CATCH CAN	
1	OCC-MB-TH1KZ	HILUX BRACKET FLAT	
4	6X12MG304BSS	M6X12 BUTTON HEAD SCREWS	
2	6X16M88ZPB	M6X16 BOLT	
2	6MZPW	M6 FLAT WASHER	
2	6X2.5X2MSW	M6 SPRING WASHER	
2	HTT-8J25	Ø25 HOSE TAIL #8 ORING	
4	FBS 35-12	SPRING CLAMP TO SUIT Ø25 HOSE	
1	HTJ-25	Ø25 HOSE JOINER	
2	S-90-25	Ø25 90° ELBOW (CUT 70X85)	